




THE INSTITUTION
OF ELECTRICAL
ENGINEERS

1987



S
N6
L25
A

IEE PROCEEDINGS-A
covering
**Physical Science, Measurement and
Instrumentation, Management and Education,**
and Reviews

UNIVERSITY LIBRARY
COLLEGE OF ENGINEERING

FEB 17 1988

Vol. 134, 1987

UNIVERSITY OF SUSSEX

FEB 19 1988



HONORARY EDITORS

IEE Reviews: Prof. F.A. Benson (*University of Sheffield*)*Special Issues*: Prof. D.T. Swift-Hook (*CERL*)*Education*: Dr. B. Bolton (*University of Bath*)*Management*: D.L. Johnston (*formerly Urwick Orr and Partners*)*General*: Dr. G.W. Chantry (*RTP Division, ETI, London*)Pages in issues of *IEE Proceedings Part A*, 1987

Pages	Issue No.	Date
1-96	1	January
97-236	2	February
237-308	3	March
309-368	4	April
369-464	5	May
465-576	6	June
577-632	7	July
633-704	8	September
705-760	9	November
761-840	10	December

This publication is copyright under the Berne Convention and the International Copyright Convention. All rights reserved. Apart from any copying under the UK Copyright Act 1956, part 1, section 7, whereby a single copy of this article may be supplied, under certain conditions, for the purposes of research or private study, by a library of a class prescribed by the UK Board of Trade Regulations (Statutory Instruments, 1957, no. 868), no part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means without the prior permission of the copyright owners. Permission is, however, not required to copy abstracts of papers or articles on condition that a full reference to the source is shown.

An IEE licensing arrangement exists whereby organisations entering into an agreement are legally entitled to make up to ten copies of an IEE paper or article.

Authorisation to photocopy items for internal or personal use, or for the internal or personal use of specific clients, is granted by the Institution of Electrical Engineers for libraries and other users registered with the Copyright Clearance Center Transactional Reporting Service, provided that the base fee of \$2.00 per copy is paid directly to the Copyright Clearance Center, Inc., 21 Congress Street, Salem, MA 01970, USA. 0143-702X/87 \$2.00 + 0.00. This consent does not extend to other kinds of copying, such as copying for general distribution, for advertising or promotional purposes, for creating new collective works, or for resale.

Photocopies of individual papers published in the *IEE Proceedings* can be supplied from the IEE Library at 10p per page plus a handling charge of 50p per page, which covers the cost of surface mail (airmail extra). The handling charge is waived if reprints are collected from Savoy Place by purchasers.

The telephone number of the IEE London office is 01 240 1871; telex: 261176 IEELDN G; facsimile: 01 240 7735

The IEE is not as a body responsible for the opinions expressed by individual authors.
The IEE is a member of the Association of Learned & Professional Society Publishers.

© 1987 The Institution of Electrical Engineers

Secretary of the IEE: H.H.W. Losty, DEng., FEng., FIEE

Managing Editor: Bernard Dunkley; *Assistant Editors*: Rachael Jones and Matthew Bacon

Graphics Manager: Maurice Partridge

Typeset by: Santype International Limited, Salisbury, Wiltshire, United Kingdom
Printed by: Unwin Brothers Ltd., Old Woking, Surrey, United Kingdom

Geometric description of bridge rectifier operational modes using regular polygons

I. Dobson, MA

Indexing terms: Mathematical techniques, Power electronics, Convertors

Abstract: AC line currents in idealised 3-phase bridge rectifier systems trace out regular polygons. This fact is used to derive a geometric visualisation of rectifier operation and to explain operational modes in 6- and 12-pulse rectifiers from a geometric point of view.

1 Introduction

Insight into the operation of 6- and 12-pulse bridge rectifiers may be gained by considering the geometric figures described by currents and voltages in the AC lines supplying the rectifier. Many rectifier phenomena are due to interactions in the AC lines and may be simply represented in the plane of the geometric figures. In particular, 12-pulse rectifier modes, which are complicated to describe algebraically, are easier to understand from a geometric point of view. This geometric analysis is complementary to the usual algebraic analysis [1, 2] and provides a visualisation of rectifier operation. Geometric visualisation of rectifier operation contributes to the qualitative understanding of rectifiers required for checking and interpreting experimental or computer simulation results.

2 6-pulse rectifier modes

Consider an idealised and balanced AC line feeding a DC load via a 6-pulse diode bridge as shown in Fig. 1. First

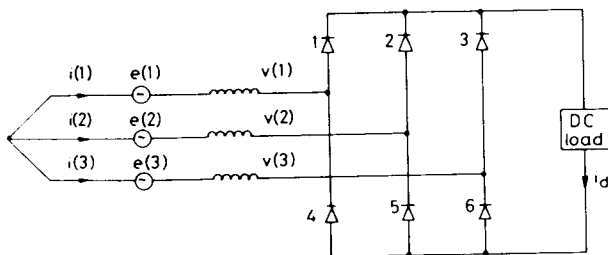


Fig. 1 6-pulse bridge rectifier

assume mode 1 operation so that commutation of current between the AC lines alternates with no commutation. The AC line currents may be regarded as the components of a 3 dimensional vector $i = (i(1), i(2), i(3))$. The star connection of the AC lines constrains the current vector i to lie in the plane P determined by

$i(1) + i(2) + i(3) = 0$. It is convenient to identify vectors in the P plane by their co-ordinates in 3-space; these co-ordinates may be evaluated by projecting the vector onto the line through one of the axes a_1, a_2, a_3 shown in Fig. 2

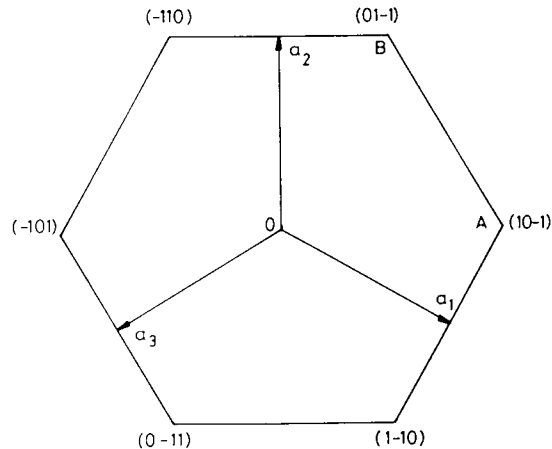


Fig. 2 Representation of AC line currents in the P plane

and determining the length of the projection as a multiple of the axis length. (a_1, a_2, a_3 are covariant axes for the P plane; see Appendix 8). When the bridge is not commutating and there is a constant load current of unity, there are six possible AC line currents; these correspond to the six possible diode switching patterns that have exactly two diodes conducting. These AC line currents form the vertices of a regular hexagon in the P plane as shown in Fig. 2. For example, when the diodes are switched in the pattern $\begin{smallmatrix} 100 \\ 001 \end{smallmatrix}$, the AC line currents are $(10 - 1)$ and the current vector is at vertex A of the hexagon. During the following commutation, when the diodes are switched in the pattern $\begin{smallmatrix} 110 \\ 001 \end{smallmatrix}$, $i(3)$ remains constant and $i(1)$ and $i(2)$ are linearly related because their sum is the unity load current and hence the current vector traverses the hexagon edge AB. The commutation ends when $i(1)$ becomes zero; that is, when the current vector crosses the line through OB and the projection on a_1 becomes zero. In this case the commutation ends when vertex B is reached. Thus in mode 1 operation with constant load current, the AC line currents describe a regular hexagon, pausing at the vertices when not commutating and traversing the edges during commutation.

The generator voltage vector $e = (e(1), e(2), e(3))$ and bridge input voltage vector $v = (v(1), v(2), v(3))$ also lie in the P plane. The vector e describes a circle in the P plane at the supply frequency and the sinusoidal components $e(1), e(2), e(3)$ may be obtained by the projection of e onto the axes a_1, a_2, a_3 . (In general, the projection of circular motion onto an axis passing through the centre of the

circle is sinusoidal even if the axis does not lie in the plane of the circle.) The length of e is proportional to the maximum generator voltage. This representation is similar to that used when representing 3-phase quantities using symmetrical components: vectors confined to the P plane are exactly those with no zero sequence component and the length of a vector rotating anticlockwise in the P plane is proportional to the positive sequence component of the quantity. The usual visualisation of positive sequence components has three rotating vectors projected onto a single axis; the P plane visualisation has a single rotating vector projected onto three fixed axes.

When the bridge is not commutating, the line currents are constant and v is equal to e . The mode 1 switching conditions are shown in Fig. 3; a diode turns off when i

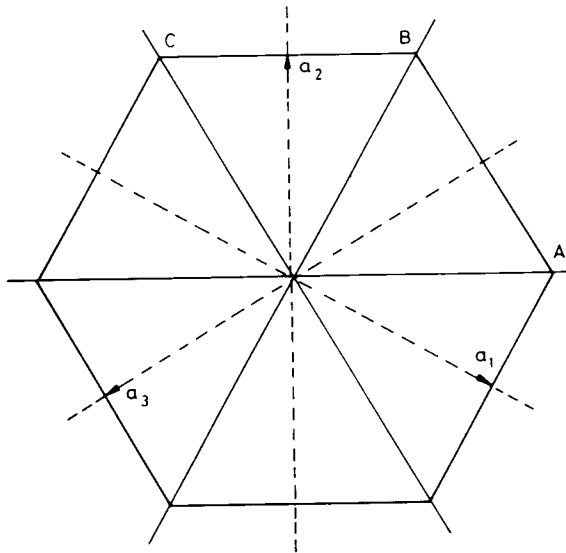


Fig. 3 Mode 1 switching conditions

crosses a solid line and a diode turns on when v crosses a dashed line. In particular, when the diode switching pattern is $\begin{smallmatrix} 100 \\ 001 \end{smallmatrix}$, and the current vector is at hexagon vertex A, the condition for diode 2 to switch on and commutation to start is $v(1) = v(2)$ or that v crosses the dashed line containing the a_3 axis. During commutation along AB, the diode switching pattern is $\begin{smallmatrix} 110 \\ 001 \end{smallmatrix}$ and phases 1 and 2 are short-circuited so that $v(1) = v(2)$. As the AC line reactances are assumed to be balanced, $v(1)$ and $v(2)$ are equal to the average of $e(1)$ and $e(2)$, which is a sinusoid half the amplitude of $e(1)$ and lagging $e(1)$ by 60° . Thus $v(1)$ and $v(2)$ may be represented by the projection on a_1 of a vector w half the length of e and lagging e by 60° as shown in Fig. 4. (For convenience the length of e is taken to be $\sqrt{2}$ in Fig. 4.) At the end of the commutation e reverts to v in all three components. Thus the line voltages are described by the components of e when there is no commutation and a selection of the components of e and w during commutation.

In mode 1 operation, v reverts to e before e has rotated past the a_2 axis; that is, before the start condition for the next commutation is reached. Thus e rotates at most 60° during a mode 1 commutation. It is well known that the commutation angle u depends on the load

current I_d according to

$$\cos u = 1 - \frac{2X}{\sqrt{3}e_{max}} I_d$$

where e_{max} is the maximum generator voltage and X is

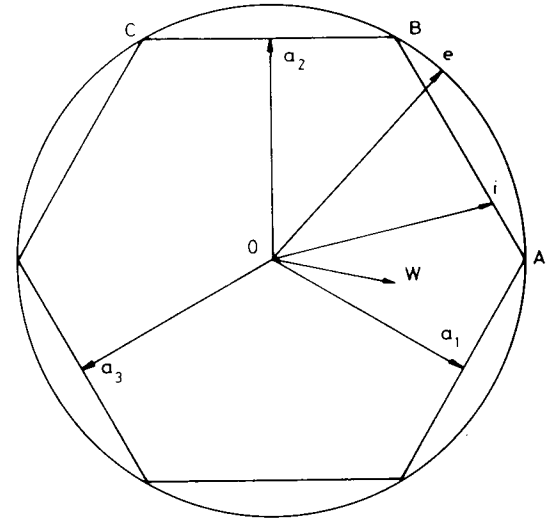


Fig. 4 Commutation along hexagon edge AB

the AC line reactance. For sufficiently high load currents, the commutation angle u exceeds 60° and mode 2 operation occurs; the start of commutation along AB is delayed until the end of the previous commutation, when v reverts to e and $v(2)$ suddenly becomes greater than $v(1)$ because e has already passed over the dashed line containing the a_3 axis. The bridge is always commutating and the current vector traverses the hexagon edges without pausing at the vertices.

Mode 3 operation occurs when the commutation angle is so large that w rotates to lie along OB and e rotates to lie along OC during the commutation. Then $v(1)$, the projection of w on a_1 , and $v(3)$, the projection of e on a_3 , vanish simultaneously, the equality of $v(1)$ and $v(3)$ causes diode 4 to turn on, and the diode switching pattern becomes $\begin{smallmatrix} 110 \\ 101 \end{smallmatrix}$. The commutation from diode 1 to diode 2 and the commutation from diode 6 to diode 4 occur simultaneously so that the current vector departs from hexagon edge AB by acquiring some velocity in the direction of BC. The commutation from diode 1 to diode 2 continues until the current vector reaches BC, when diode 2 has unity current and hence diode 1 has zero current and turns off. During the simultaneous commutations the current vector 'rounds off' the vertex of the hexagon and the AC lines do not supply all of the load current; the balance of the load current is supplied by the loop current passing through diodes 1 and 4 and the load.

3 12-pulse rectifier modes

The geometric method used to describe the 6-pulse rectifier modes extends readily to 12-pulse rectifier modes 1, 2 and 3.

Consider the 12-pulse rectifier system shown in Fig. 5, in which two 6-pulse bridges are connected in series. In

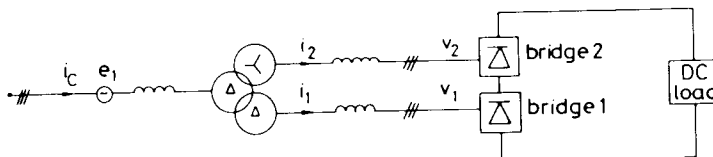


Fig. 5 12-pulse bridge rectifier

mode 1 operation, the commutations in the two bridges alternate and the currents i_1 , i_2 in the AC lines *individual* to each bridge describe hexagons in the P plane; the 30° phase shift of the transformer causes i_2 to describe a hexagon which is displaced 30° from the hexagon described by i_1 . The *common* AC line current vector i_c is the sum of i_1 and i_2 and describes a regular dodecagon as shown in Fig. 6. i_c pauses at the dodecagon vertices when

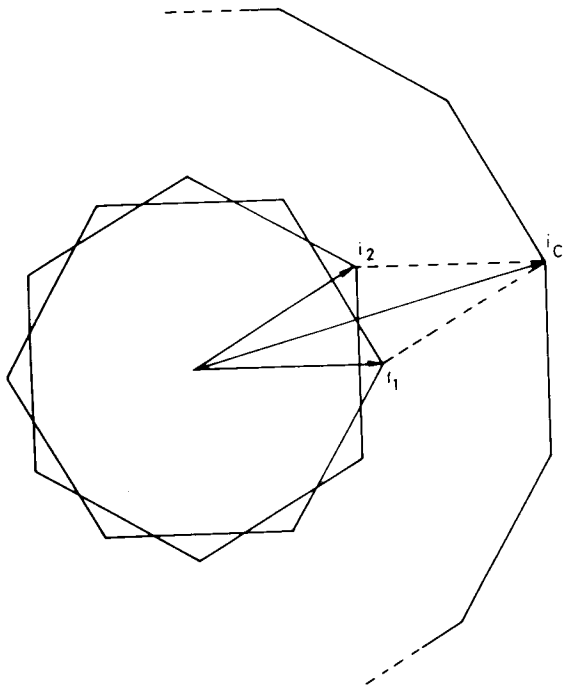


Fig. 6 12-pulse AC line currents

neither bridge is commutating and traverses a dodecagon edge when one of the bridges is commutating.

To describe the AC line voltages, it is convenient to define e_2 to be the displacement of the generator voltages e_1 through 30° ; e_2 describes the generator voltages supplied to bridge 2 when the transformer phase shift is taken into account and is shown in Fig. 7. When neither

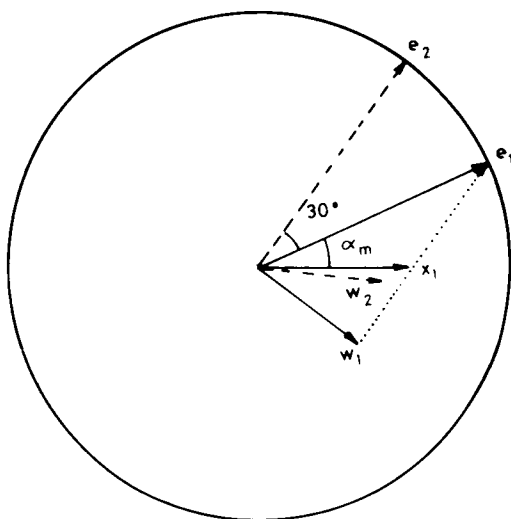


Fig. 7 12-pulse AC line voltages

bridge is commutating, the bridge input voltage vectors v_1 and v_2 are e_1 and e_2 respectively. When bridge 2 is commutating, the shortcircuited components of v_2 revert to w_2 just as in the 6-pulse case. The shortcircuited components of v_1 revert to w_1 in proportion to the ratio of

the inductance of the common AC line to the inductance of the common and individual AC lines combined. That is, if the ratio of common to total AC line inductance is k , v_1 reverts to $x_1 = (1 - k)e_1 + kw_1$ (see Fig. 7). k is a measure of the amount of interaction between the two bridges. The angle by which x_1 lags e_1 is denoted by α_m ; elementary trigonometry reproduces the formula given in Reference 2 for α_m in terms of k :

$$\tan \alpha_m = \frac{k\sqrt{3}}{4 - 3k}$$

In mode 1 operation, the start condition for commutation of bridge 1 occurs 30° after the start of commutation in bridge 2; bridge 2 commutations occupy less than 30° so that bridge 2 is not commutating and v_1 is equal to e_1 when e_1 rotates past a dashed line. In mode 2 operation, the commutation angle exceeds 30° and the relevant components of v_1 continue to be determined by x_1 , causing the start of the bridge 1 commutation to be delayed until the bridge 2 commutation ends. The angle of delay is denoted by α . The maximum value of α is α_m , for if α exceeds α_m , x_1 passes the dashed line and commutation in bridge 1 starts before the bridge 2 commutation ends. The simultaneous commutations distinguish mode 3 operation. The description of AC line voltages when bridge 1 is commutating is similar and may be obtained by interchanging the labels 1 and 2 in the above description.

The common AC line current vector i_c describes a dodecagon in modes 1 and 2; in mode 2 there is no pause at the vertices. In mode 3, the simultaneous commutation of the 2 bridges causes i_c to describe a dodecagon with rounded corners.

4 Discussion

The AC line currents of a less idealised rectifier may depart from accurate polygonal trajectories; however, visualising the circuit dynamics in the P plane may still provide insights. For example, the effect of varying the load current during a commutation may be imagined by superimposing on the polygonal trajectory a motion perpendicular to the polygon edge being traversed. Varying the load current when there is no commutation and the current vector is stationary at a polygon vertex may be imagined by correspondingly varying the length of the current vector.

Geometric models are potentially useful for 3-phase rectifier connections other than bridge connections. Any 3-phase currents or voltages which sum to zero may be represented in the P plane and circuit symmetry and an assumption of constant load current will generally cause the AC line currents to describe regular polygons. The P plane representation is also suitable for visualising decoupled natural modes of bridge rectifier currents [3].

When analysing data from a real or simulated rectifier it is desirable to be able to plot AC line quantities in the P plane. 3-phase line current data expressed as $(i(1), i(2), i(3))$ may be displayed in the P plane by plotting $(i(2) - i(3))/\sqrt{2}$ as a vertical co-ordinate against $(\sqrt{3}/\sqrt{2})i(1)$ as a horizontal co-ordinate.

5 Conclusions

A geometric model of idealised 3-phase bridge rectifier operation based on the regular figures described by AC line currents and voltages has been presented. The

method has been illustrated by giving an account of 6- and 12-pulse rectifier modes from a geometric point of view. Extension of the method to visualise phenomena in less idealised or more general rectifier connections has been suggested. Geometric methods can improve the qualitative understanding of rectifier phenomena and are a pleasing way to exhibit the symmetry of rectifier connections.

6 Acknowledgments

This work was supported in part by NSF under grant ECS8352211.

7 References

- 1 WITZKE, R.L., KRESSER, J.V., and DILLARD, J.K.: 'Influence of A-C reactance on voltage regulation of 6-phase rectifiers', *Trans. Amer. Inst. Electr. Eng.*, 1953, **72**, Pt. 1, pp. 244-253
- 2 WITZKE, R.L., KRESSER, J.V., DILLARD, J.K.: 'Voltage regulation of 12-phase double-way rectifiers', *ibid.*, 1953, **72**, Pt. 1, pp. 689-697

- 3 DOBSON, I.: 'Representation and simulation of AC/DC convertor systems using fixed and varying electrical axes', *IEE Proc. A*, 1987, **134**, (1), pp. 67-83

8 Appendix

Axes a_1 , a_2 , and a_3 are covariant axes convenient for determining the 3-space co-ordinates of points in the P plane. A short calculation shows how the first co-ordinate of a point $x = (x(1), x(2), x(3))$ in the P plane may be found by using the a_1 axis:

a_1 has co-ordinates $(1, -\frac{1}{2}, -\frac{1}{2})$ and its length is $\sqrt{3}/\sqrt{2}$. The length of the projection of x onto a_1 is

$$\frac{a_1 \cdot x}{|a_1|} = \frac{x(1) - \frac{1}{2}x(2) - \frac{1}{2}x(3)}{|a_1|} = \frac{\frac{3}{2}x(1)}{|a_1|} = \frac{\sqrt{3}}{\sqrt{2}} x(1)$$

as $x(1) + x(2) + x(3) = 0$. Therefore the length of this projection expressed as a multiple of $|a_1|$ is $x(1)$. It follows, for example, that ideal 3-phase voltages with unity peak magnitude are represented in the P plane by a voltage vector describing a circle of radius $\sqrt{3}/\sqrt{2}$.